


Data Sheet

R-Series V RH5 POWERLINK

Magnetostrictive Linear Position Sensors

- Minimum position resolution 0.5 µm
- Position and velocity measurements for up to 30 magnets
- Field adjustments and diagnostics using the new TempoLink smart assistant

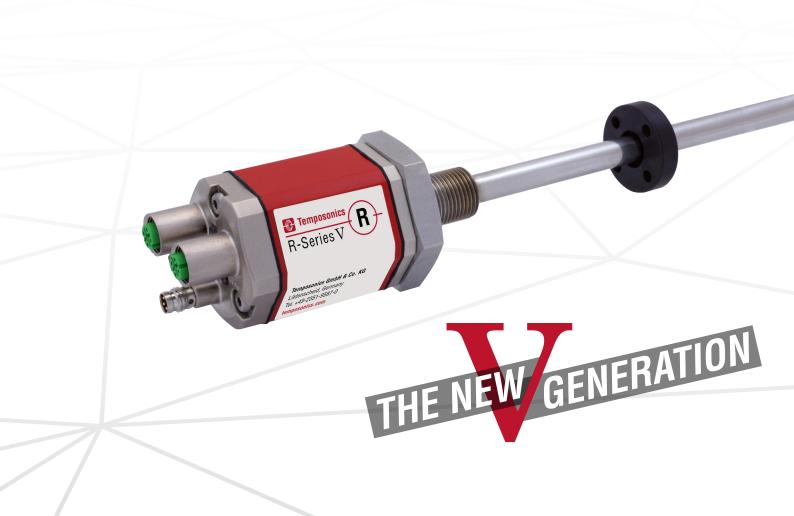

MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Temposonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Temposonics position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the end of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

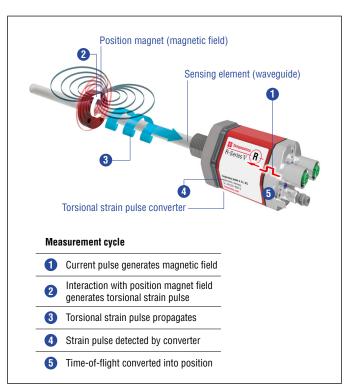


Fig. 1: Time-of-flight based magnetostrictive position sensing principle

R-SERIES V POWERLINK

Temposonics® R-Series V brings very powerful sensor performance to meet the many demands of your application. The R-Series V is the long term solution for harsh environments that have high levels of shock and vibration. The sensor is equipped with POWERLINK V2 and supports a minimum cycle time of 250 μs . In time-critical applications, the linear extrapolation can be activated. This offers a cycle time of 200 μs for every sensor stroke length. The measurement of the sensor can be synchronized to the polling cycle of the controller. Temposonics® R-Series V sensors are available with internal linearization which offers improved linearity for overall higher accuracy of the position measurement values. In addition to the measured position value via the POWERLINK protocol further data about the current sensor status, such like the total distance travelled, the internal temperature and the total operating hours, can be displayed for diagnostic purposes.

With many outstanding features the R-Series \ensuremath{V} sensors are fit for a very broad range of applications.

TempoLink® SMART ASSISTANT

The TempoLink® smart assistant is an accessory for the R-Series V family of sensors that supports setup and diagnostics. Depending on the sensor protocol it enables the adjustment of parameters like measurement direction, resolution and filter settings. For diagnostics and analysis of operational data the R-Series V sensors continuously track values such as total distance traveled by the positon magnet, internal temperature of the sensor and the quality of the position signal. This additional information can be read out via TempoLink® smart assistant even while the sensor remains operational in the application. TempoLink® smart assistant is connected to the sensor via the power connection, which now adds bidirectional communication for setup and diagnostics. The TempoLink® smart assistant is operated using a graphical user-interface that will be displayed on your smartphone, tablet, laptop or PC. Just connect your Wi-Fi-enabled device to TempoLink® Wi-Fi access point and go to the website URL for the user-interface.



Fig. 2: R-Series V sensor with TempoLink® smart assistant

TECHNICAL DATA

Output							
Interface	Ethernet POWERLINK						
Data protocol	POWERLINK V2						
Measured value	Position, velocity/option: Simultaneous multi-position and multi-velocity measurements up to 30 magnets						
Measurement parameters							
Resolution: Position	0.5100 μm (selectable)						
Cycle time ¹	Stroke length $ \le 50 \text{ mm} $ $ \le 715 \text{ mm} $ $ \le 2000 \text{ mm} $ $ \le 4675 \text{ mm} $ $ \le 7620 \text{ mm} $						
	Cycle time 250 μs 500 μs 1000 μs 2000 μs 3200 μs						
Linearity deviation ²	Stroke length ≤ 500 mm > 500 mm						
	Linearity deviation ≤ ±50 μm < 0.01 % F.S.						
	Optional internal linearization: Linearity tolerance (applies for the first magnet for multi-position measurement)						
	Stroke length 25300 mm 300600 mm 6001200 mm typical ± 15 μm ± 20 μm ± 25 μm						
	maximum $\pm 25 \mu\text{m}$ $\pm 30 \mu\text{m}$ $\pm 50 \mu\text{m}$						
Repeatability	< ±0.001 % F.S. (minimum ±2.5 μm) typical						
Hysteresis	< 4 μm typical						
Temperature coefficient	< 15 ppm/K typical						
Operating conditions							
Operating temperature	-40+85 °C (-40+185 °F)						
Humidity	90 % relative humidity, no condensation						
Ingress protection	IP67 (connectors correctly fitted)						
Shock test	150 g/11 ms, IEC standard 60068-2-27						
Vibration test	30 g/102000 Hz, IEC standard 60068-2-6 (excluding resonant frequencies)/ RH5-J: 15 g/102000 Hz, IEC standard 60068-2-6 (excluding resonant frequencies)						
EMC test	Electromagnetic emission according to EN 61000-6-3 Electromagnetic immunity according to EN 61000-6-2						
Operating pressure	The sensor meets the requirements of the EC directives and is marked with C € 350 bar (5076 psi)/700 bar (10,153 psi) peak (at 10 × 1 min) for sensor rod/RH5-J: 800 bar (11,603 psi)						
Magnet movement velocity	Any						
Design / Material	Ally						
Sensor electronics housing	Aluminum (painted), zinc die cast						
Sensor flange	Aluminum (painted), zinc die cast Stainless steel 1.4305 (AISI 303)						
Sensor rod	Stainless steel 1.4305 (AISI 303) Stainless steel 1.4306 (AISI 304L)/RH5-J: Stainless steel 1.4301 (AISI 304)						
Stroke length	257620 mm (1300 in.)/RH5-J: 255900 mm (1232 in.)						
Mechanical mounting							
Mounting position	Any						
Mounting instruction	Please consult the technical drawings on page 4						
Electrical connection							
	2 × M12 female connectors (D-coded), 1 × M8 male connector;						
Connection type	2 × M12 female connectors (D-coded), 1 × M12 male connector (A-coded)						
Connection type Operating voltage	2 × M12 remaile connectors (D-coded), 1 × M12 maile connector (A-coded) +1230 VDC ±20 % (9.636 VDC)						
Operating voltage							
	+1230 VDC ±20 % (9.636 VDC)						
Operating voltage Power consumption	+1230 VDC ±20 % (9.636 VDC) Less than 4 W typical						

^{1/} Minimum cycle time for multi-position measurements (number of magnets \geq 2): 400 μs 2/ With position magnet # 251 416-2

TECHNICAL DRAWING

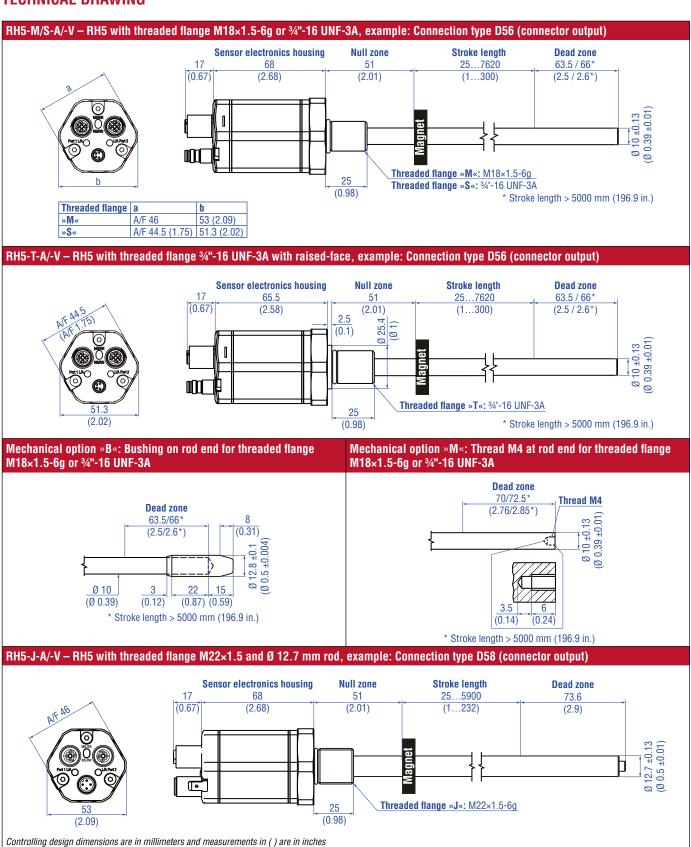


Fig. 3: Temposonics® RH5 with ring magnet

CONNECTOR WIRING

D56		
Port 1 – Signal		
M12 female connector (D-coded)	Pin	Function
	1	Tx (+)
402	2	Rx (+)
3	3	Tx (-)
View on sensor	4	Rx (-)
Port 2 – Signal		
M12 female connector (D-coded)	Pin	Function
	1	Tx (+)
2 (4)	2	Rx (+)
1	3	Tx (-)
View on sensor	4	Rx (-)
Power supply		
M8 male connector	Pin	Function
	1	+1230 VDC (±20 %)
6 9	2	Not connected
View on sensor	3	DC Ground (0 V)
VIEW UII SCIISUI	4	Not connected


Fig. 4: Connector wiring D56


D58		
Port 1 – Signal	_	
M12 female connector (D-coded)	Pin	Function
	1	Tx (+)
(4) (2)	2	Rx (+)
3	3	Tx (-)
View on sensor	4	Rx (-)
Port 2 – Signal		
M12 female connector (D-coded)	Pin	Function
	1	Tx (+)
2 (4)	2	Rx (+)
1	3	Tx (-)
View on sensor	4	Rx (-)
Power supply		
M12 male connector (A-coded)	Pin	Function
	1	+1230 VDC (±20 %)
	2	Not connected
	3	DC Ground (0 V)
View on sensor	4	Not connected


Fig. 5: Connector wiring D58


FREQUENTLY ORDERED ACCESSORIES – Additional options available in our Accessories Guide 3551444

Position magnets









U-magnet OD33 Part no. 251 416-2

Material: PA ferrite GF20 Weight: Approx. 11 g Surface pressure: Max. 40 N/mm² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+105 °C (-40...+221 °F) Marked version for sensors with internal linearization: Part no. 254226

Ring magnet OD33 Part no. 201 542-2

Material: PA ferrite GF20 Weight: Approx. 14 g Surface pressure: Max. 40 N/mm² Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+105 °C (-40...+221 °F) Marked version for sensors with inter-

nal linearization: Part no. 253 620

Ring magnet OD25.4 Part no. 400 533

Material: PA ferrite Weight: Approx. 10 g Surface pressure: Max. 40 N/mm² Operating temperature: –40…+105 °C (–40…+221 °F)

Marked version for sensors with internal linearization: Part no. 253 621


Ring magnet Part no. 402 316


Material: PA ferrite coated Weight: Approx. 13 g Surface pressure: Max. 20 N/mm² Operating temperature: -40...+100 °C (-40...+212 °F)


Position magnet


Magnet spacer

O-rings









Block magnet L Part no. 403 448

Material: Plastic carrier with hard ferrite magnet Weight: Approx. 20 g Fastening torque for M4 screws: 1 Nm Operating temperature: -40...+75 °C (-40...+167 °F)

This magnet may influence the sensor performance specifications for some applications.

Magnet spacer Part no. 400 633

Material: Aluminum Weight: Approx. 5 g Surface pressure: Max. 20 N/mm² Fastening torque for M4 screws: 1 Nm

O-ring for threaded flange M18×1.5-6g Part no. 401 133


Material: Fluoroelastomer Durometer: 75 ± 5 Shore A Operating temperature: -40...+204 °C (-40...+400 °F)


O-ring for threaded flange 34"-16 UNF-3A Part no. 560 315


Material: Fluoroelastomer Durometer: 75 ± 5 Shore A Operating temperature: -40...+204 °C (-40...+400 °F)


0-ring

Mounting accessories










O-ring for threaded flange M22×1.5-6g Part no. 561 337

Material: FPM Durometer: 75 Shore A Operating temperature: -20...+200 °C (-6...+392 °F)



Hex jam nut M18×1.5-6g Part no. 500 018

Material: Steel, zinc plated

Hex jam nut 3/4"-16 UNF-3A Part no. 500 015

Material: Steel, zinc plated


161


Fixing clip Part no. 561 481


Application: Used to secure sensor rods (Ø 10 mm (Ø 0.39 in.)) when using an U-magnet or block magnet Material: Brass, non-magnetic


Cable connectors* - Signal

Cable connectors* - Power









M12 D-coded male connector (4 pin), straight Part no. 370 523

Material: Zinc nickel-plated Cable Ø: 5.5...7.2 mm (0.2...0.28 in.)

Termination: Insulation-displacement Wire: 24 AWG - 22 AWG Operating temperature: -25...+85 °C (-13...+185 °F) Ingress protection: IP65 / IP67 (correctly fitted)

M12 connector end cap Part no. 370 537

Female connectors M12 should be covered by this protective cap Material: Brass nickel-plated Ingress protection: IP67 (correctly fitted Fastening torque: 0.39...0.49 Nm

M12 A-coded female connector (4 pin/5 pin), straight Part no. 370 677

Material: GD-Zn, Ni Termination: Screw Contact insert: CuZn Cable Ø: 4...8 mm (0.16...0.31 in.) Wire: 1.5 mm² Operating temperature: −30...+85 °C (−22...+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.5 Nm Fastening torque: 0.6 Nm

M8 female connector (4 pin), straight Part no. 370 504

Material: CuZn nickel plated Termination: Solder Cable Ø: 3.5...5 mm (0.14...0.28 in.) Wire: 0.25 mm² Operating temperature: -40...+85 °C (-40...+185 °F) Ingress protection: IP67 (correctly fitted)

Programming kit

Fastening torque: 0.6 Nm

Cables









TempoLink® kit for Temposonics® R-Series V Part no. TL-1-0-EM08 (D56) Part no. TL-1-0-EM12 (D58)

- · Connect wirelessly via Wi-Fi enabled device or via USB with the diagnostic
- · Simple connectivity to the sensor via 24 VDC power line (permissible cable length: 30 m)
- · User friendly interface for mobile devices and desktop computers
- See data sheet "TempoLink® smart assistant" (document part no.: 552070) for further information

PUR signal cable Part no. 530 125

Material: PUR jacket; green Features: Cat 5, highly flexible, halogen free, suitable for drag chains, mostly oil & flame resistant Cable Ø: 6.5 mm (0.26 in.) Cross section: 2 × 2 × 0.35 mm² (22 AWG) Operating temperature:

-20...+60 °C (-4...+140 °F)

Signal cable with M12 D-coded male connector (4 pin), straight - M12 D-coded, male connector (4 pin), straight Part no. 530 064

Material: PUR jacket; green Features: Cat 5e Cable length: 5 m (16.4 ft) Cable Ø: 6.5 mm (0.26 in.) Ingress protection: IP65, IP67, IP68 (correctly fitted) Operating temperature: -30...+70 °C (-22...+158 °F)

Signal cable with M12 D-coded male connector (4 pin), straight - RJ45 male connector, straight Part no. 530 065

Material: PUR jacket; green Features: Cat 5e Cable length: 5 m (16.4 ft) Cable Ø: 6.5 mm (0.26 in.) Ingress protection M12 connector: IP67 (correctly fitted) Ingress protection RJ45 connector: IP20 (correctly fitted) Operating temperature: -30...+70 °C (-22...+158 °F)

Controlling design dimensions are in millimeters and measurements in () are in inches

^{*/} Follow the manufacturer's mounting instructions

Temposonics® R-Series V RH5 POWERLINK

Data Sheet

Cables





PVC power cable Part no. 530 108

Material: PVC jacket; gray
Features: Shielded, flexible,
mostly flame resistant
Cable Ø: 4.9 mm (0.19 in.)
Cross section: 3 × 0.34 mm²
Bending radius: 10 × D
Operating temperature:
-30...+80 °C (-22...+176 °F)

Power cable with M8 female connector

(4 pin), straight – pigtail Part no. 530 066 (5 m (16.4 ft.)) Part no. 530 096 (10 m (32.8 ft.)) Part no. 530 093 (15 m (49.2 ft.))

Material: PUR jacket; gray Features: Shielded Cable Ø: 5 mm (0.2 in.) Operating temperature: -40...+90 °C (-40...+194 °F)

ORDER CODE

1 2 3	4 5	6 7	8 9 10	11 12	13 14 15	16	17 18 19 20
R H 5					D 5	1	U 3 1
a	b c		d	е	f	g	h

a Sensor model

R H 5 Rod

b Design

- **B** Base unit (only for replacement)
- J Threaded flange M22×1.5-6g (rod Ø 12.7 mm), stroke length: 25...5900 mm (1...232 in.)
- M Threaded flange M18×1.5-6g (standard)
- S Threaded flange 3/4"-16 UNF-3A (standard)
- T Threaded flange 3/4"-16 UNF-3A (with raised-face)

c Mechanical options

- **A** Standard
- B Bushing on rod end (only for design »M«, »S« & »T«)
- M Thread M4 at rod end (only for design »M«, »S« & »T«)
- V Fluorelastomer seals for the sensor electronics housing

d Stroke length

X X X X M 0025...7620 mm

[A A A GOZGIIII GOZGIIII					
Standard stroke length (mm)	Ordering steps				
25 500 mm	5 mm				
500 750 mm	10 mm				
7501000 mm	25 mm				
10002500 mm	50 mm				
25005000 mm	100 mm				
50007620 mm	250 mm				

X X X X U 001.0...300.0 in.

Ordering steps	
0.2 in.	
0.4 in.	
1.0 in.	
2.0 in.	
4.0 in.	
10.0 in.	
	0.2 in. 0.4 in. 1.0 in. 2.0 in. 4.0 in.

Non-standard stroke lengths are available; must be encoded in 5 mm/0.1 in. increments.

e Number of magnets

X X 01...30 position(s) (1...30 magnet(s))

f | Connection type

D 5 6 2×M12 female connectors (D-coded),

1 x M8 male connector

D 5 8 2×M12 female connectors (D-coded), 1×M12 male connector (A-coded)

g System

1 Standard

h Output

U 3 0 1 POWERLINK, position and velocity

(1...30 position(s))

U 3 1 1 POWERLINK, position and velocity, internal linearization (1...30 position(s))

NOTICE

- Specify the number of magnets for your application and order the magnets separately.
- The number of magnets is limited by the stroke length.
 The minimum allowed distance between magnets (i.e. front face of one to the front face of the next one) is 75 mm (3 in.).
- Use magnets of the same type for multi-position measurement, e.g. 2 × U-magnet (part no. 251 416-2).
- If the option for internal linearization (U311) in h "Output" is chosen, select a suitable magnet.

DELIVERY



RH5-B:

- Base unit (without flange/rod assembly)
- 3 socket screws M4

RH5-J/-M/-S/-T:

- Sensor
- 0-ring

Accessories have to be ordered separately.

Manuals, Software & 3D Models available at: www.temposonics.com



UNITED STATES 3001 Sheldon Drive

Temposonics, LLC Cary, N.C. 27513

Americas & APAC Region Phone: +1 919 677-0100

E-mail: info.us@temposonics.com

GERMANY Auf dem Schüffel 9 Temposonics 58513 Lüdenscheid GmbH & Co. KG Phone: +49 2351 9587-0

ITALY Phone: +39 030 988 3819

Branch Office E-mail: info.it@temposonics.com

FRANCE Phone: +33 6 14 060 728

Branch Office E-mail: info.fr@temposonics.com

UK Phone: +44 79 21 83 05 86

Branch Office E-mail: info.uk@temposonics.com

SCANDINAVIA Phone: +46 70 29 91 281

Branch Office E-mail: info.sca@temposonics.com

CHINA Phone: +86 21 2415 1000 / 2415 1001

Branch Office E-mail: info.cn@temposonics.com

JAPAN Phone: +81 3 6416 1063

Branch Office E-mail: info.jp@temposonics.com

temposonics.com

Document Part Number:

552008 Revision B (EN) 11/2021



