


Temposonics®

Magnetostrictive Linear Position Sensors



MH-Series Flexible MH Product Brief

- ▶ **Linear, absolute measurement**
- ▶ **Easy in-field installation and replacement**
- ▶ **Stroke lengths from 500...5000 mm**
- ▶ **Resolution: ± 0.2 mm**
- ▶ **Analog and CANbus output options**



Designed for use with hydraulic cylinders in mobile applications, the externally threaded Flexible MH sensor features an innovative two-part design. This design allows users to separate the flexible sensing element and electronics from the housing without opening the hydraulic system.

While it is manageable to install and remove hydraulic cylinder sensors at a manufacturing facility, it can be extremely challenging in the field. Trained service technicians can remove and replace the internal components with just 200 mm of clearance regardless of stroke length and without breaking the hydraulic seal. This serviceability means decreased downtime and disruption, providing increased productivity. Replacement units ship as coiled rings to ease handling and reduce shipping costs.


TYPICAL APPLICATIONS

The FMH sensor was designed for applications where there is a desire to be able to service the sensor with a minimum amount of space available to remove and replace the sensor. Some potential applications include: Fire Trucks, Surface Drills (mining, wells), Concrete pumpers, Telescopic Material Handlers

Features

Measured value	Position
Output	Analog (Voltage / Current), CANbus
Resolution	Typ. ± 0.2 mm
Stroke length	500...5000 mm
EMC	ISO 14982 - Agricultural and forestry machinery ISO 13766 - Earth-moving machinery EN 13309 - Construction machinery RF immunity to 200 V/m per ISO 11452-2/-4
Connection type	M12 connector (IP69K with mating M12 connector)
Operating voltage	12 / 24 VDC (8...32 VDC)

Sensor dimension references

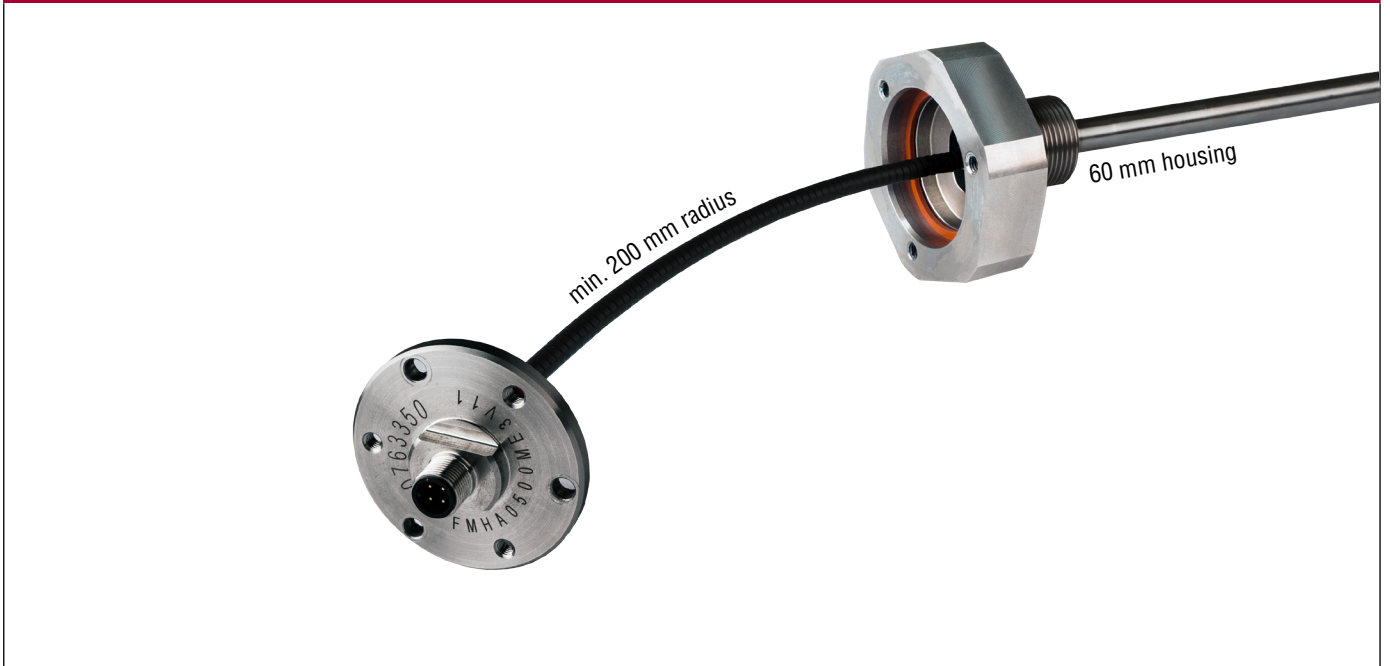

Document Part Number:

551586 Revision B (EN) 07/2016

LOCATIONS

USA
MTS Systems Corporation
Sensors Division
 3001 Sheldon Drive
 Cary, N.C. 27513, USA
 Tel. +1-919-677-0100
 Fax +1-919-677-0200
 info.us@mtssensors.com
 www.mtssensors.com

JAPAN
MTS Sensors Technology Corp.
 737 Aihara-machi,
 Machida-shi,
 Tokyo 194-0211, Japan
 Tel. +81-42-775-3838
 Fax +81-42-775-5512
 info.jp@mtssensors.com
 www.mtssensors.com

FRANCE
MTS Systems SAS
 Zone EUROPARC Bâtiment
 EXA 16
 16/18, rue Eugène Dupuis
 94046 Créteil, France
 Tel.: +33-1 58 43 90 28
 Fax: +33-1 58 43 90 03
 info.fr@mtssensors.com
 www.mtssensors.com

GERMANY
MTS Sensor Technologie
GmbH & Co. KG
 Auf dem Schüffel 9
 58513 Lüdenscheid, Germany
 Tel. +49-23 51-95 87 0
 Fax +49-23 51-5 64 91
 info.de@mtssensors.com
 www.mtssensors.com

CHINA
MTS Sensors
 Room 504, Huajing Commercial Center,
 No. 188, North Qinzhou Road
 200233 Shanghai, China
 Tel: +86-21 6485 5800
 Fax: +86-21 6495 6329
 info.cn@mtssensors.com
 www.mtssensors.com

ITALY
MTS Systems Srl. Sensor Division
 Via Camillo Golgi, 5/7
 25064 Gussago (BS), Italy
 Tel.: +39-030 988 38 19
 Fax: +39-030 982 33 59
 info.it@mtssensors.com
 www.mtssensors.com

LEGAL NOTICES

MTS, Temposonics and Level Plus are registered trademarks of MTS Systems Corporation in the United States; MTS SENSORS and the MTS SENSORS logo are trademarks of MTS Systems Corporation within the United States. These trademarks may be protected in other countries. All other trademarks are the property of their respective owners. Copyright © 2016 MTS Systems Corporation. No license of any intellectual property rights is granted. MTS reserves the right to change the information within this document, change product designs, or withdraw products from availability for purchase without notice. Typographic and graphics errors or omissions are unintentional and subject to correction. Visit www.mtssensors.com for the latest product information.

ISO 9001
 CERTIFIED

